

**NOTES:**

1. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5.

REV.	DESCRIPTION	DATE	APPR.
A	SEE ECN 1309005	03/10/14	AK

**SPECIFICATIONS:**

OXYGEN OUTPUT.....20 SCFH @ 20 PSI  
9.4 L/MIN @ 1.4 BAR

OXYGEN DEWPOINT.....-60 °F (-51 °C)

OXYGEN PURITY.....93 % ± 3 %

OXYGEN OUTLET FITTING.....CGA 022 (OXYGEN B FITTING)

FEED AIR REQUIREMENTS.....COMPRESSOR INCLUDED ON STANDARD MODELS  
4.9 SCFM (AVG. FLOW) FOR COMPRESSOR-LESS MODELS  
AT 30-45 PSIG INCOMING PRESSURE

AIR QUALITY REQ.....ISO 8573.1 CLASS 1.4.1 MINIMUM (SEE BELOW)

**SOUND LEVELS:**

STANDARD (WITHOUT COVER) .....68 dBA @ 1 M  
WITH COVER.....65 dBA @ 1 M  
WITH REDUCED NOISE OPTION.....55 dBA @ 1 M

**DIMENSIONS:**

STANDARD.....17 IN x 10 IN x 27.5 IN (WxDxH)  
(43 CM) x (25.5 CM) x (70 CM) (WxDxH)

WITH FEET.....17 IN x 10 IN x 28.5 IN (WxDxH)  
(43 CM) x (25.5 CM) x (72.5 CM) (WxDxH)

**APPROXIMATE WEIGHT:**

STANDARD (NO COVER, NO FEET).....67 LB (30.4 KG)  
WITH COVER.....80 LB (36.3 KG)  
WITH FEET.....ADD 1 LB (0.45 KG)

**POWER REQUIREMENTS:**

STANDARD (NORTH AMERICA).....115 VAC, 60 HZ, SINGLE PHASE, 10.0 A  
OPTIONAL (INTERNATIONAL).....230 VAC, 50 HZ, SINGLE PHASE, 5.0 A  
OPTIONAL (INTERNATIONAL).....230 VAC, 60 HZ, SINGLE PHASE, 5.0 A

RESPONSE TIME.....APPROXIMATELY 3 CYCLES TO ATTAIN  
MAXIMUM CONCENTRATION/PURITY AFTER  
INITIAL START-UP OR EXTENDED SHUTDOWN

POSITIONING.....THE UNIT MUST BE OPERATED IN AN UPRIGHT  
POSITION ONLY, WITH NO OBSTRUCTION  
BLOCKING AIR FLOW AROUND THE UNIT,  
6 IN MINIMUM


**SPECIFICATIONS: ISO 8573.1 CLASS 1.4.1**

DIRT PARTICLES 1-5 MICRON.....0

WATER PRESSURE DEWPOINT .....+37 °F (3 °C) (940 PPM AT 100 PSIG)

OIL CONCENTRATION  
(INCLUDING VAPOR).....0.01 (<= 3 PPM)

\* A STANDARD CUBIC FOOT (SCF) IS A CUBIC FOOT OF GAS AT  
14.7 PSIA (SEA LEVEL ATMOSPHERIC PRESSURE) AND 60 °F

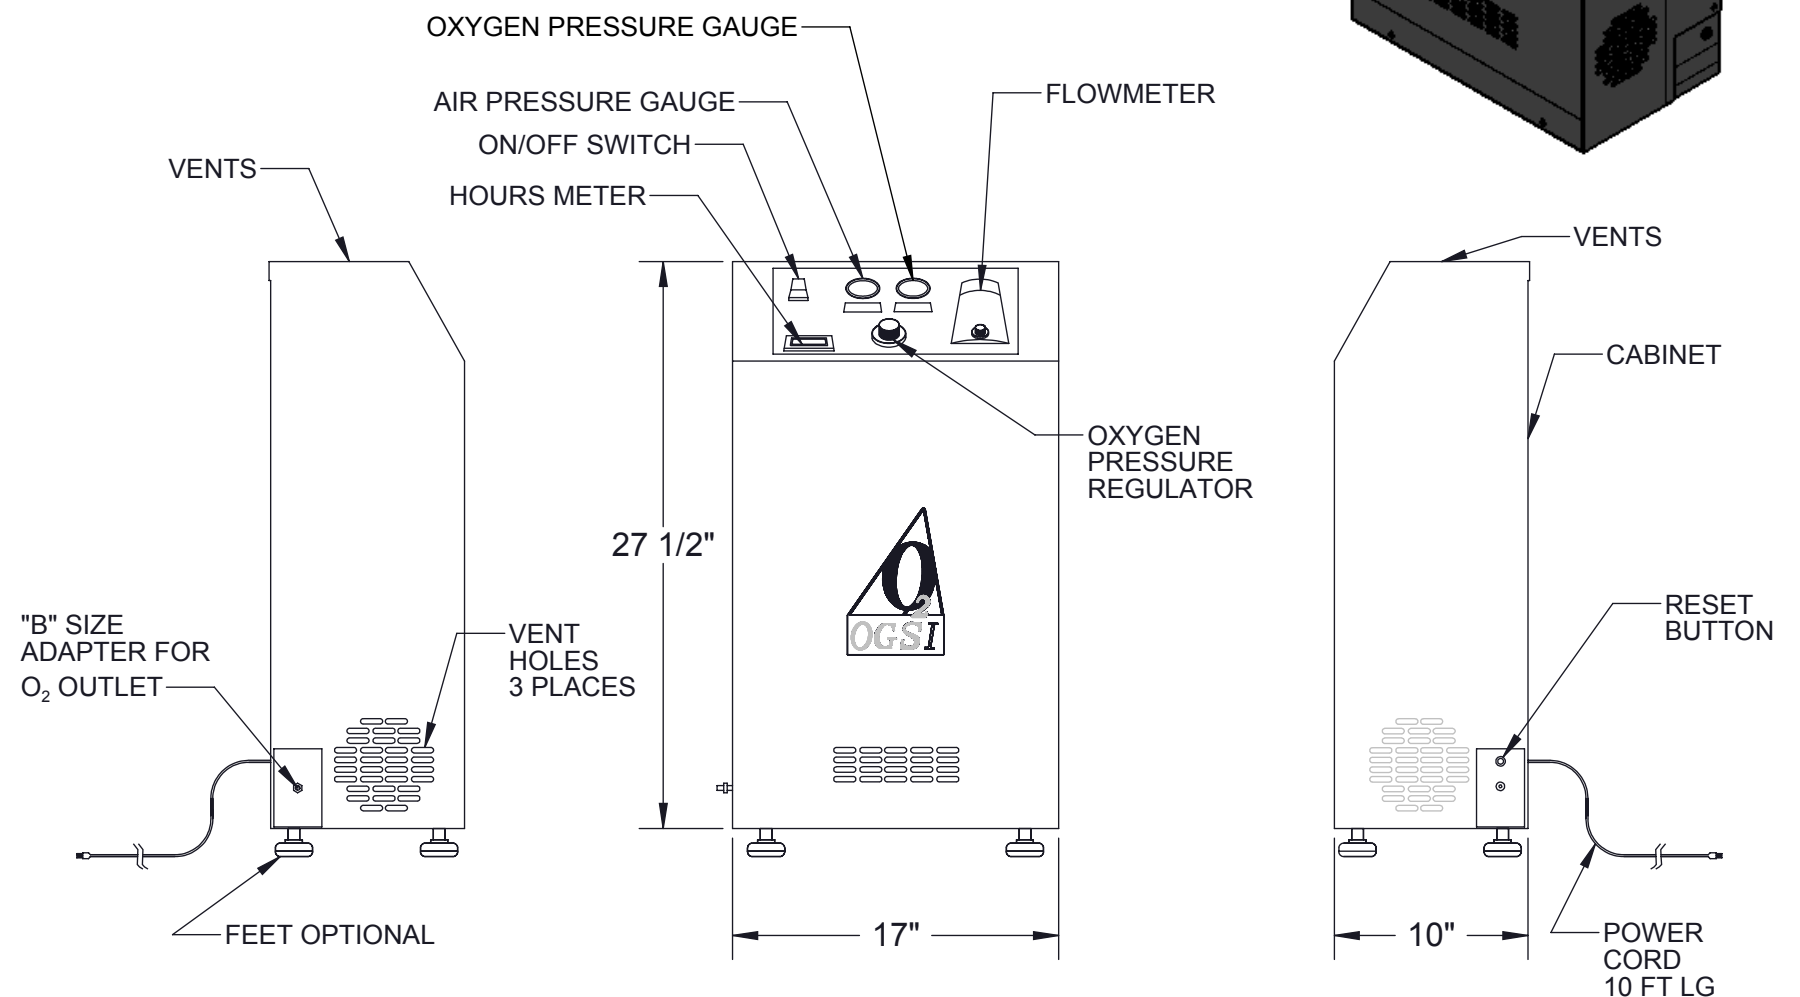

DRAWN:		DATE:	PART NO.:	DRAWING TITLE:	
T. MEYER		09/01/13	10002	GENERAL ARRANGEMENT, OG20 & OG20T	
S. GILMOUR		03/10/14		STOCK NO.	QTY.
<b>UNLESS OTHERWISE SPECIFIED</b> DECIMALS: .XXX +/- .005 FRACTIONS: +/- 1/16 ANGLES: +/- 1°		REMOVE ALL BURRS AND BREAK SHARP EDGES 1/16" MAX		DO NOT SCALE DRAWING	
<b>PROPRIETARY AND CONFIDENTIAL</b> All drawings, descriptions, prints, specifications, etc. bearing this notice, together with the information, and ideas contained therein, are the sole and exclusive property of Audubon Machinery Corp. Any disclosure or use thereof not authorized in writing by Audubon Machinery Corp. is unlawful and will be prosecuted to the full extent of the law.			<b>AUDUBON MACHINERY CORP.</b> 814 Wurlitzer Dr., N. Tonawanda, NY 14120		SHEET: 1 OF 1