



OZONE • MEDICAL • AQUACULTURE • METAL FABRICATION
GLASS BLOWING • OXYGEN BARS • JEWELRY MANUFACTURING

OG-15

Durability By Design

Oxygen Generating Systems Inc. Best Selling Model

The OG-15 extracts oxygen from the atmosphere, concentrates it up to 95% purity, and delivers the oxygen to any application.

Dependable

The OG-15 is completely self-contained. Its internal air compressor, filtration system, zeolite sieve, surge tank, and flow control system were designed for 24 hour operation.

Durable

The OG-15 is built on a powder coated steel chassis. Its anodized aluminum sieve beds are fitted with custom molded composite end caps for years of reliable service. Weighing almost 73 lbs (33kg) the OG-15 is *the* industrial strength oxygen concentrator.

Safe

Why bother with the danger of high-pressure cylinder oxygen? The OG-15's built-in regulator allows you to set the delivery pressure according to your needs. The 1/3 Horsepower compressor maintains an internal pressure of less than 32 psi, and delivers an optimal flow of oxygen at up to 12 psi.

Economical


Oxygen is free! Eliminate the unnecessary costs of transportation, storage, and cylinder rental. The OG-15 uses less than 1/2 kilowatt of electricity to deliver up to 15 cubic feet of oxygen per hour.

Simple to Use and Maintain

With a lighted on/off switch, integrated control panel, digital hours meter, custom flow gauges and controls, the OG-15 is truly user friendly. Just plug it in, turn it on, and set the desired pressure and flow. Check and clean the inlet air filter every 6 months, and you're done. The zeolite sieve (which actually separates oxygen from nitrogen) is regenerative, and does not need to be replaced for the life of the unit.



OG-15 WITH
POWDER COATED STEEL COVER

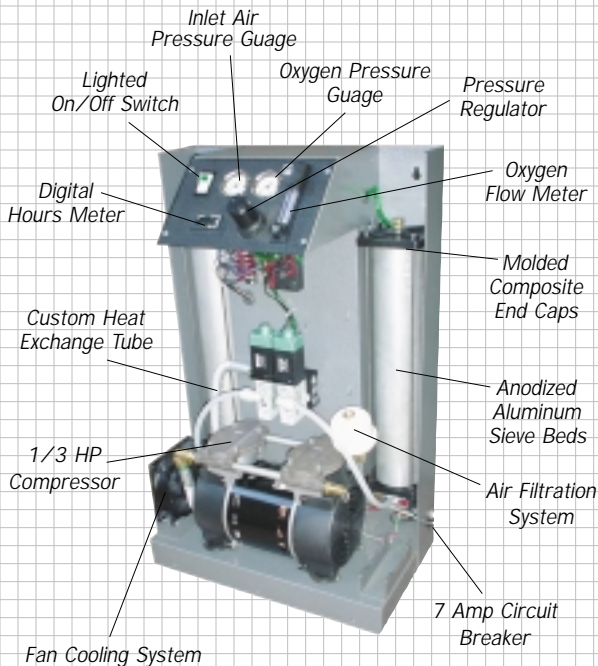

OG-15 WITH COVER REMOVED

PRODUCT DATA SHEET
Oxygen Generating Systems Inc.

1-800-414-OGSI • 716-731-1455
6474

www.ogsi.com




Model OG-15 Specifications

Oxygen Output	15 SCFH @ 9.0 PSIG 0.40 Nm ³ / hr @ 62.1 kPa (0.62 BAR)
Dewpoint	-60°F (-51° C)
Oxygen Purity	90% +/- 5% (depending on flow rate)
Sound Levels	62 dba @ 1 meter, open field conditions (with enclosure)
Dimensions (W x D x H)	17.25 x 10 x 30 inch 44 x 25.5 x 76.2 cm
Weight	73 lb. (33 kg)
Power Requirements	120 VAC Model: 120 VAC, 60 Hz, Single Phase, 4.0 ampere 220 VAC Model: 220 VAC, 50/60 Hz, Single Phase, 2.0 ampere

NOTE: All specifications listed above are for the following conditions: 70°F, 30% Relative Humidity, Sea Level Elevation. The OG-15 must be operated in an upright position with no obstruction blocking the airflow around the unit.

Model OG-15 Performance Curve

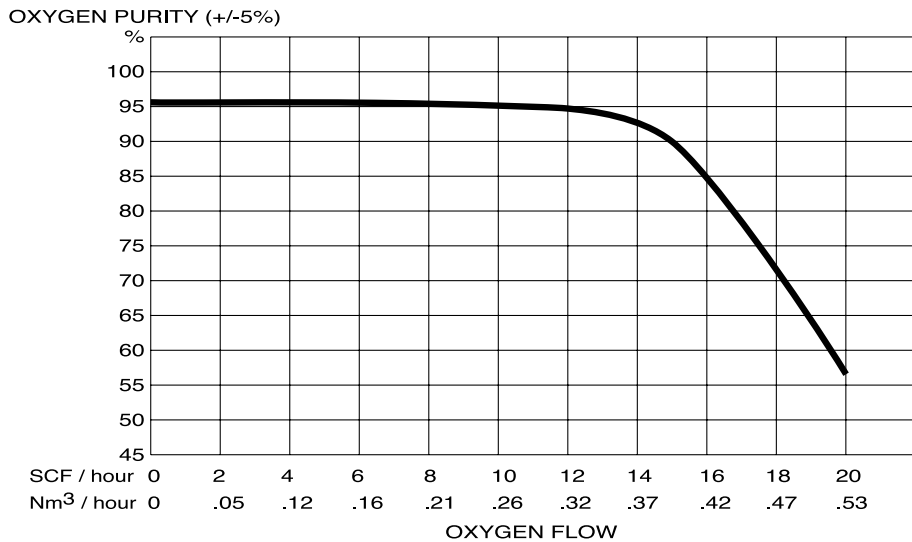

NOTE: SCF (standard cubic foot) gas measured at 1 atmosphere and 70°F and 0% humidity. Nm3 (normal cubic meters) gas measured at 1 atmosphere, 0°C and 0% relative humidity.

Modifications Available

Option Code	Description
T	220 Volts AC 60 HZ
S	Sandstone (White) Chassis and Cover
N	No Cover
R	Rubber Feet (for tabletop use)
A9	Medical Package (Rubber feet, Cannula, Hydrator, and muffler modifications for quiet operation)

Compressorless and OEM versions available for high-pressure applications.



2221 Niagara Falls Boulevard • Niagara Falls, New York 14304
1-800-414-OGSI(6474) • Phone 716/731-1455 • Fax 716/731-1358
www.ogsi.com

Durability By Design